

BOX TRAILER **EVO**

Technical specifications




evo.wielton.com

TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Website: <https://evo.wielton.com/>

Trailer specifications

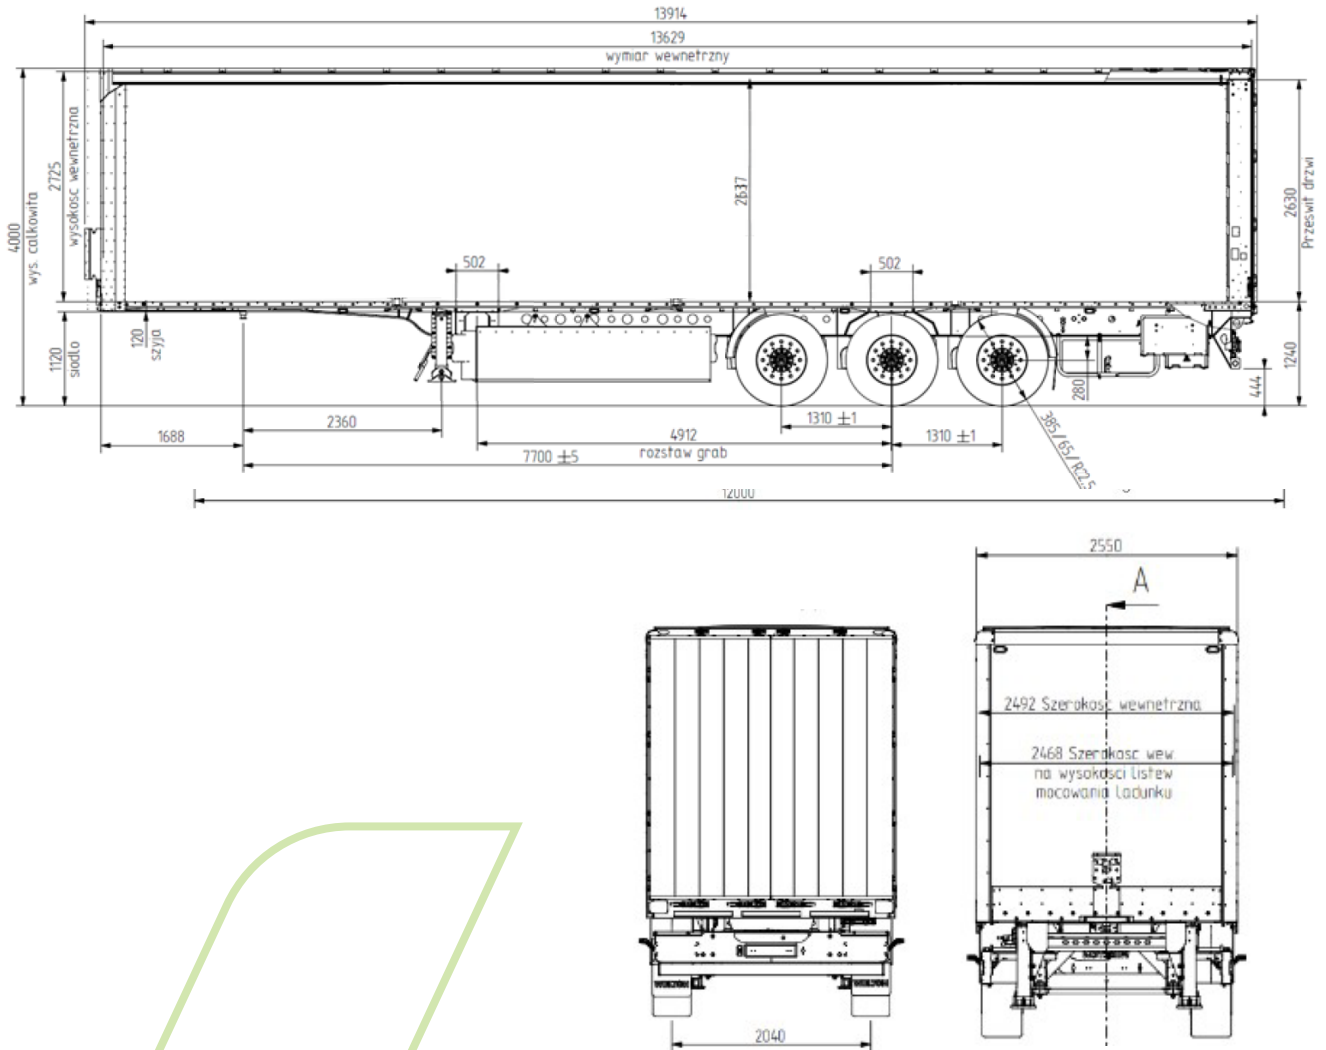

TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Trailer specifications

Saddle height	1120 mm
External length	13 820 mm
Internal platform length	13 562 mm
External width	2 550 mm
Internal width	2 468 mm
External height	4 000 mm
Internal height	2 725 mm
Door clear height	2 650 mm
Number of euro pallets	33
Unladen weight (basic version)	6100 kg

Chassis

EVO Frame
Steel lamp mounting
Waterproof plywood floor 30mm, load capacity 7t
Steel rear bumper
Fixed bumper
Retractable steel side bumpers
Steel rear bumpers
Ferry hooks 4 per side

Frame Colour

Cataphoretic coating
Frame colour RAL 7021 (gray black)

Axles and Suspension

Number of axles: 3 rigid axles
1st axle lift *
Without 3rd axle lift
Saddle 1120
Axles 3×9000 kg 22.5
Axle manufacturer: BPW

** Note: According to EU regulations, when driving with the 1st axle lifted, the maximum permissible axle spacing is not maintained, i.e. the turning radius is exceeded.
Therefore, driving with the 1st axle lifted is carried out solely at the User's own responsibility and risk.*

TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Pneumatics (Brakes)

Steel air tanks

EBS system Knorr 4th generation

Knorr disc brake system

Other Chassis Equipment

Wheel chocks

Without spare wheel carrier (available as an additional accessory at extra cost)

Without winch

Without toolboxes (available as additional accessories at extra cost)

Ladder: Folding, galvanised, sliding from under the rear portal

Electrics

15 PIN connection sockets

EBS socket

Aspöck hybrid lighting (EP3)

Safety systems

Telematics ATP C TPMS - ABERG Connect

Body / Frame

Edge rail with additional cargo securing hooks inside the trailer – 17 per side

Body construction

Side walls with 20 mm PET foam core, both sides covered with impact-resistant reinforced laminate

Roof – aluminium frame construction with aluminium sheeting

Front wall of reinforced plywood 21 mm with vertical galvanised steel profiles and galvanised steel sheet in the lower section

Aerodynamic aluminium front corner posts glued and riveted to the front wall

Galvanised steel portal frame, bolted

Roll-formed steel floor-level protective strip at 230 mm height

1st row Combi Track cargo securing rails at 1200 mm height

Lighting – LED strip mounted under the roof profile – length 10 m

Rear doors made of 25 mm aluminium, with 2 locks and rigid hinges

Door retainers securing the rear doors when open

Reflective marking of the side and rear outline of the vehicle

Connection panel on the front wall

TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Step strap attached to the portal frame

Standard body colour – white RAL 9010

Steel roof drainage gutter


Certificates

Compliance with EU type approval, ECMT, TIR, beverages, XL, ADR II


TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Additional accessories (at extra cost)

Package 1: Double spare wheel carrier + 2 x toolbox 145L

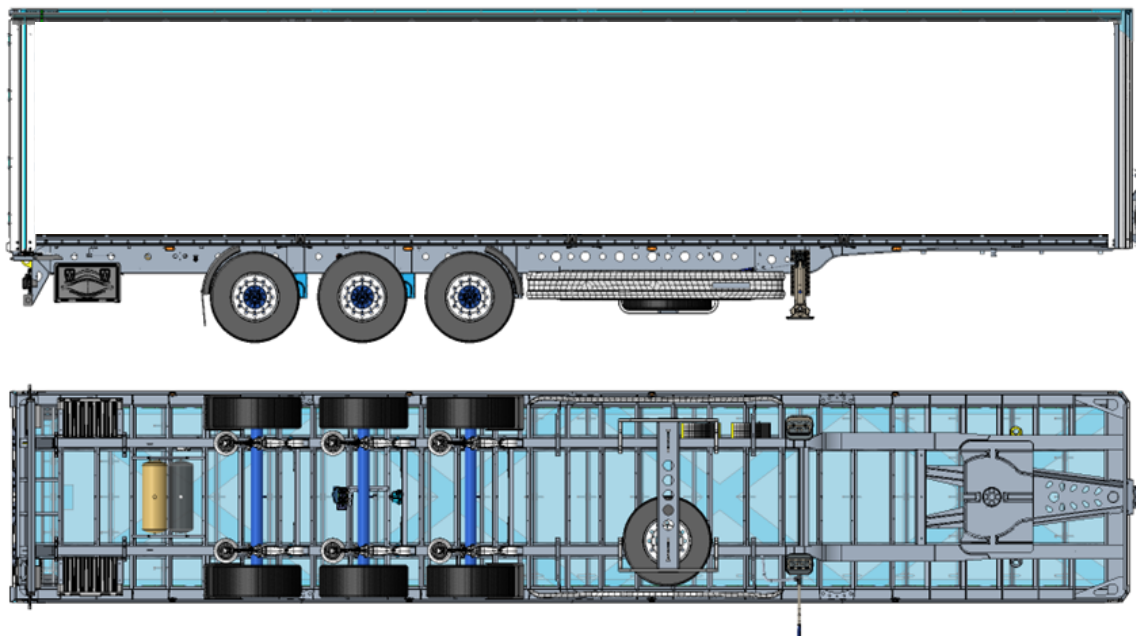


Packaget 2: Single spare wheel carrier + toolbox 145L

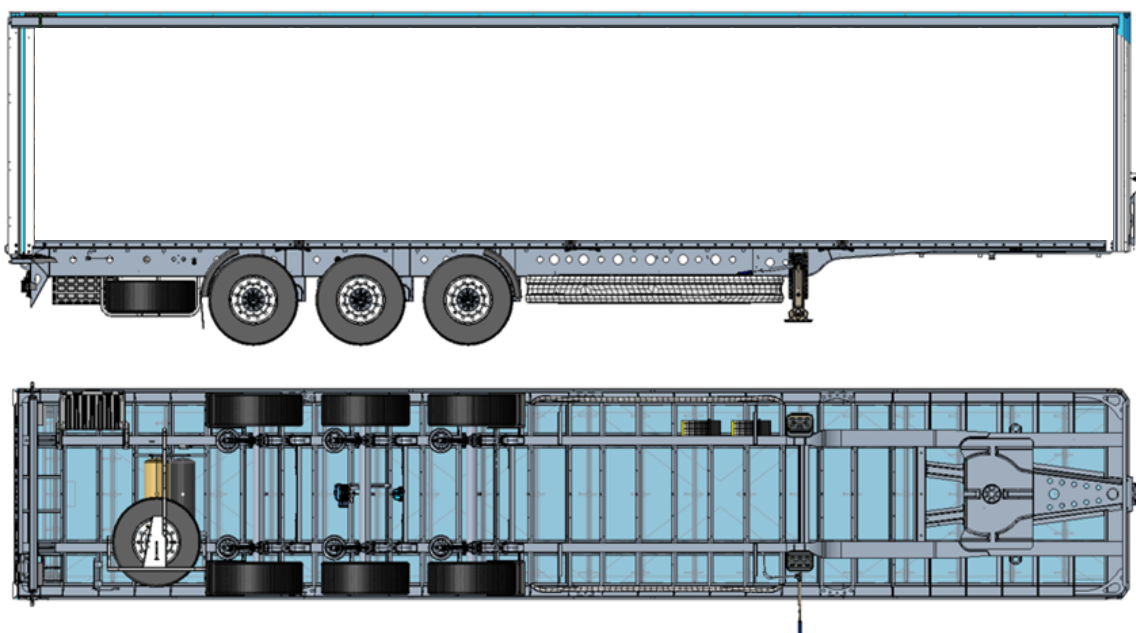


TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Additional accessories (at extra cost)

Package 3: 2 x toolbox 145L

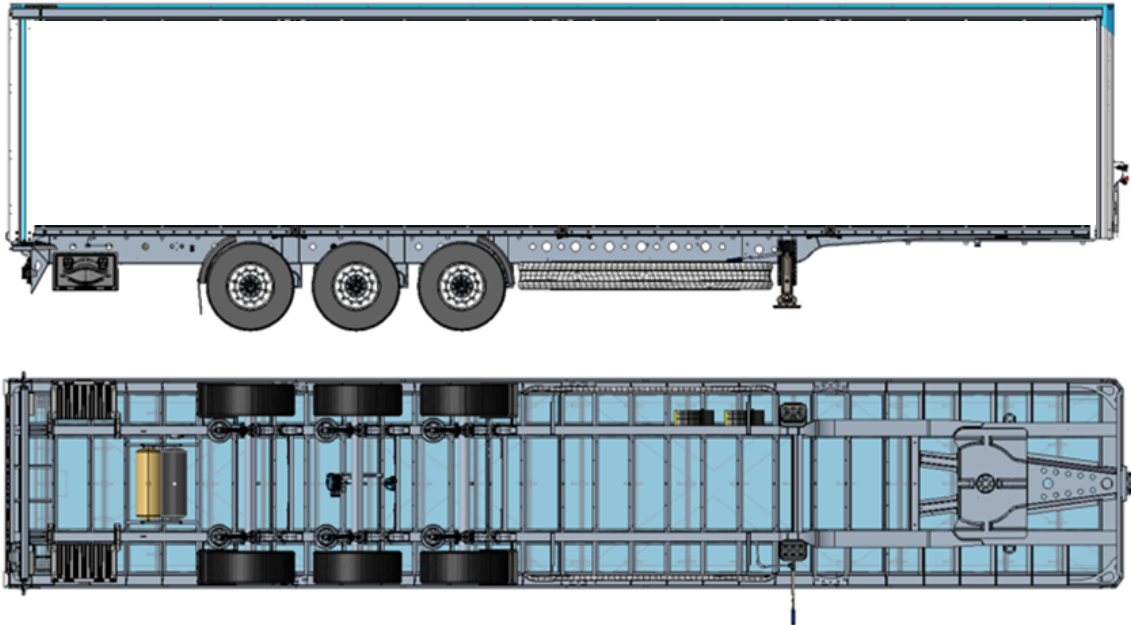

Package 4: Box for 24 pallets + double spare wheel carrier + toolbox 60L

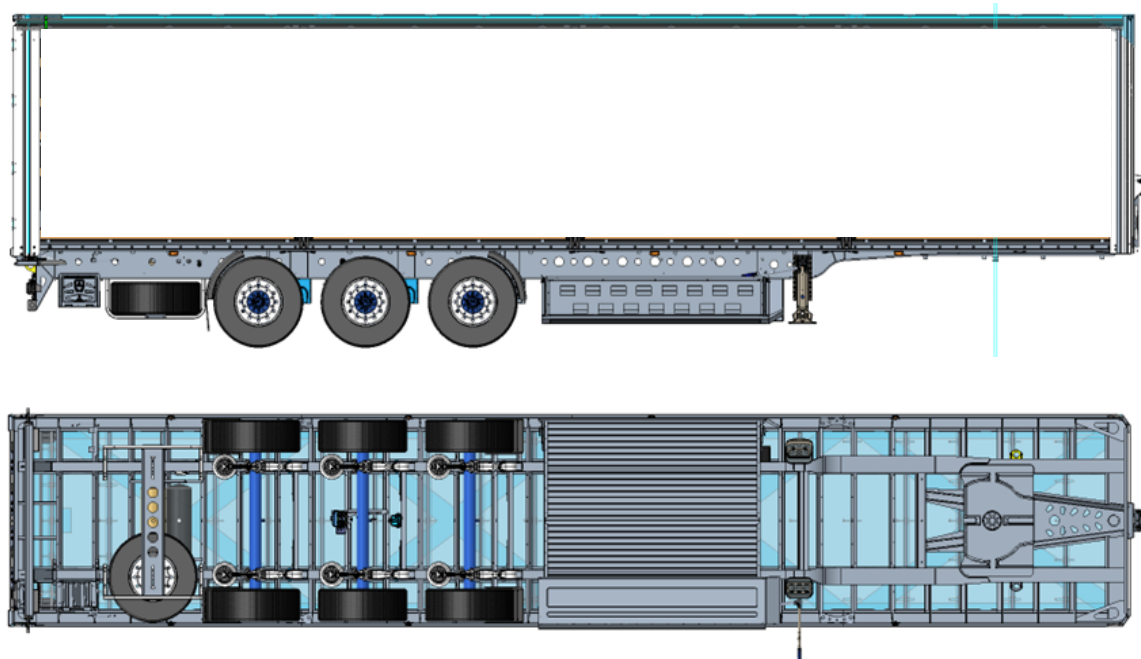

2nd row Combi Track cargo securing rails at 1600 mm height

Spare wheel

Adapter z 1x15-pin na 2x7 pin ("binocular" adapter)

TECHNICAL SPECIFICATION WIELTON EVO BOX TRAILER

Additional services (optional)

Extended warranty **+12 months**
Extended warranty **+24 months**
Extended warranty **+36 months**

Warranty

Manufacturer's Warranty Book available at www.evo.wielton.com
Wielton S.A. additionally offers its customers the Assistance 24/7 service
In the event of a breakdown, we provide access to an international emergency phone number.
Assistance emergency call: +48 509 655 955

Delivery Conditions

Collection from the company headquarters in Wielun

Price and value

Zgodnie z informacjami na stronie www.evo.wielton.com oraz w podsumowaniu zamówienia złożonego na stronie

Service

In accordance with the information on the website www.evo.wielton.com and in the order summary submitted on the website

Terms of Execution and Payment

Terms of execution and payment are set out in the OWS document available at OWS – General Terms and Conditions of Sale | Wielton EVO Curtainsider Trailer - Wielton EVO

GDPR Information Clause for Contractors

Please review the Privacy Policy at: <https://evo.wielton.com/polityka-prywatnosci>

ADDITIONAL SERVICES AND ACCESSORIES ARE VISIBLE AFTER ADDING THEM IN THE ORDER SUMMARY PLACED ON EVO.WIELTON.COM

evo.wielton.com